

NSC SERIES



The **NSC** is a high quality stainless steel 304 open channel range of luminaires suitable for use with T8 (26mm) fluorescent as well as suitable for **LED TUBES**. Slender and versatile, the stainless steel channel offers resistance to more corrosive elements as well offers a Hi-Tech look to the retailing industry. Available in 600mm, 1200mm, 1500mm double lamp version only, and also available with a stainless steel wing.

APPLICATIONS

Ideal for

- Distribution Centres
- Warehouse lighting
- Factory lighting
- Storage lighting
- Parking Garrages and walkways
- Retail / shopping lighting
- Coastal areas, subject to higher than normal humidity.

Ingress Protection: IP20

Permit No.
2061/9658



SANS/IEC 60598-2-1



| | | | | |
|---|---|---|--|---|
| Nordland Lighting P.O.Box 522 Muldersdrift 1747 Tel. (011)662 4300 Fax. (011) 662 4319 Email: sales@nordland.co.za | Matelec (Pty) Ltd. Unit 13, Magnum Park 108 Bofors Circle Epping 2, Cape Town 7460 Tel. (021) 534 9544 Fax. (021)534 7132 Email: rushana@matelec.co.za | Afrilite cc Unit 10, Rossmead 14 Malane Road Westmead Industrial Park Pinetown 3610 Tel. (031) 701 1119 Email: afrilite@mweb.co.za | Farad Agencies 7 Sinclair Avenue Bonnie Doom, East London P.O. Box 15015 Beacon Bay, 5205 Tel. +27 (043)735 2044 farad@africa.com | Indonesia PT. Raphita Jaya Mandiri Mutiarra Bekasi Centre, Kav B No. 9, jln. Jend. Ahmad Yani RT. 009/RW012, KEL Kayuringin Jaya, Bekasi Selatan, Bekasi JAWA Barat 17114, Indonesia |
|---|---|---|--|---|

Body: Formed from Stainless Steel, and the control gear cover acts as a reflector. The reflector is secured by means of two stainless steel butterfly nuts.

Control Gear: Switch start and electronic ballasts available for the 18W, 36W and 58w double lamps.

Lampholders: Twist lock, one end springloaded the other fixed.


Lampholder End cap: The lampholders are clipped into an injection moulded end cap to hold the lamps securely in position. The relamp, the lamp cap is notched to allow for easy access.

Emergency: these fluorescent luminaires can be fitted with inverter charger and battery backup, to operate in the maintained and non-maintained modes.

Mounting: two bosses are stamped into the back of the luminaire with a 5mm central hole.

Entries: provision is made for a knockout at either end. The body is punched with a centre rose to match a standard outlet box.

Dimming options available on request

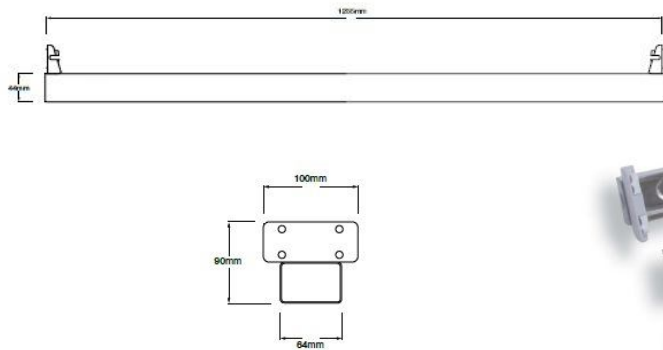

| Catalogue No. | Lamp Type | Total Wattage (W) | L (mm) | W (mm) | H (mm) | Lamp Cap | Power Factor |
|-------------------------|-----------|-------------------|--------|--------|--------|----------|--------------|
| NSC218 SS | 18W | 50W | 625 | 100 | 90 | G13 | 0.85 |
| NSC236W SS | 36W | 84W | 1240 | 100 | 90 | G13 | 0.85 |
| NSC236W ELB | 36W | 71W | 1240 | 100 | 90 | G13 | 0.98 |
| NSC258W SS | 58W | 158W | 1540 | 100 | 90 | G13 | 0.85 |
| NSC 258W ELB | 58W | 110W | 1540 | 100 | 90 | G13 | 0.95 |
| NSC 18W LED-1200 | 18W | 18W | 1240 | 100 | 90 | G13 | - |
| NSC 24W LED-1500 | 24W | 24W | 1540 | 100 | 90 | G13 | - |