



The **NBV** rectangular series bulkhead, stylish, economical and all South African energy efficient compact fluorescent robust suitable for industrial and/or public buildings, weather-proof ceiling or wall mounting luminaires if required, particularly where low running costs and long trouble-free operation are important. Suitable for indoor and outdoor applications.

Permit No.  
2061/9658



**Applications:**

- Subway Lighting
- Stairways Lighting
- Corridor Lighting
- Landings
- Ramps
- Public Buildings

**Ingress Protection: 55**

**Body Housing:** Thin wall, manufactured from LM6 die cast aluminium. Finished in white epoxy powder coated.

**Diffuser:** One-piece injection-moulded from clear impact and thermal resistance UV stabilized polycarbonate with internal prisms and smooth exterior visor.

**Gasket:** Captive silicone gasket provides seal for outdoor use. Ideal for wet or dust locations.

**Lamp holder:** Only 2G11 type linear compact fluorescent lamps are suitable.

**Control Gear:** 230 V electronic control gear is used with terminal block suitable for 4 mm<sup>2</sup>.

**Screws:** Two captive stainless steel screws operate through the diffuser flange for easy location.

**Lamps:** The bulkhead can be supplied with two 11 W or one 18 W linear compact fluorescent lamps as well as with 5W and 8W **LED** for emergency signs.

**Cable Entry:** Single compression gland size 00.

**Emergency Version:** The bulkhead is suited for use as a self-contained LED emergency lighting luminaire. Internal inverter charger and battery pack, are mounted on the control gear tray.

Maintained and non-maintained modes.



**Emergency Duration:** 3 Hours or 6 Hours.

**Reflector:** The reflector system is manufactured from mild steel sheet, formed for extra strength and finished in hard baked white epoxy paint.

**NBV** is suitable for use as an exit sign. For this option the appropriate decal is applied to the diffuser. Decals to be ordered separately.

Options:

- ...../MR/AL - Man running, arrow left decal
- ...../MR/AR - Man running, arrow right decal
- ...../MR/AD - Man Running, arrow down decal
- ...../EXIT - Exit decal

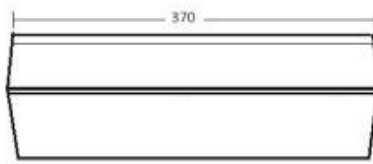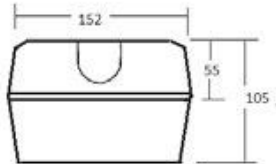

Catalogue Number	Wattage (W)	Length (mm)	Width (mm)	Height (mm)	Electronic	Mass (kg)
NBV 2x11 W CFL	2x11 W	370	152	55	26 W	2.17
NBV 1x18 W CFL	18 W	370	152	55	19 W	2.08
NBV 1 Luga 8W LED	8W	370	152	55	8W	2.06
NBV LED Strip / EM	5 W	370	152	55	5 W	2.04