

NSC SERIES



The **NSC** is a high quality stainless steel 304 open channel range of luminaires suitable for use with T8 (26mm) fluorescent as well as suitable for **LED TUBES**. Slender and versatile, the stainless steel channel offers resistance to more corrosive elements as well offers a Hi-Tech look to the retailing industry. Available in 600mm, 1200mm, 1500mm double lamp version only, and also available with a stainless steel wing.

APPLICATIONS

Ideal for

- Distribution Centres
- Warehouse lighting
- Factory lighting
- Storage lighting
- Parking Garrages and walkways
- Retail / shopping lighting
- Coastal areas, subject to higher than normal humidity.

Ingress Protection: IP20

Permit No.
2061/9658



SANS/IEC 60598-2-1



Nordland Lighting P.O.Box 522 Muldersdrift 1747 Tel. (011)662 4300 Fax. (011) 662 4319 Email: sales@nordland.co.za	Matelec (Pty) Ltd. Unit 13, Magnum Park 108 Bofors Circle Epping 2, Cape Town 7460 Tel. (021) 534 9544 Fax. (021)534 7132 Email: rushana@matelec.co.za	Afrilite cc Unit 10, Rossmead 14 Malane Road Westmead Industrial Park Pinetown 3610 Tel. (031) 701 1119 Email: afrilite@mmweb.co.za	Farad Agencies 7 Sinclair Avenue Bonnie Doom, East London P.O. Box 15015 Beacon Bay, 5205 Tel. +27 (043)735 2044 farad@africa.com	Indonesia PT. Raphita Jaya Mandiri Mutiarra Bekasi Centre, Kav B No. 9, jln. Jend. Ahmad Yani RT. 009/RW012, KEL Kayuringin Jaya, Bekasi Selatan, Bekasi JAWA Barat 17114, Indonesia
---	---	--	--	---

Body: Formed from Stainless Steel, and the control gear cover acts as a reflector. The reflector is secured by means of two stainless steel butterfly nuts.

Control Gear: Switch start and electronic ballasts available for the 18W, 36W and 58w double lamps.

Lampholders: Twist lock, one end springloaded the other fixed.


Lampholder End cap: The lampholders are clipped into an injection moulded end cap to hold the lamps securely in position. The relamp, the lamp cap is notched to allow for easy access.

Emergency: these fluorescent luminaires can be fitted with inverter charger and battery backup, to operate in the maintained and non-maintained modes.

Mounting: two bosses are stamped into the back of the luminaire with a 5mm central hole.

Entries: provision is made for a knockout at either end. The body is punched with a centre rose to match a standard outlet box.

Dimming options available on request

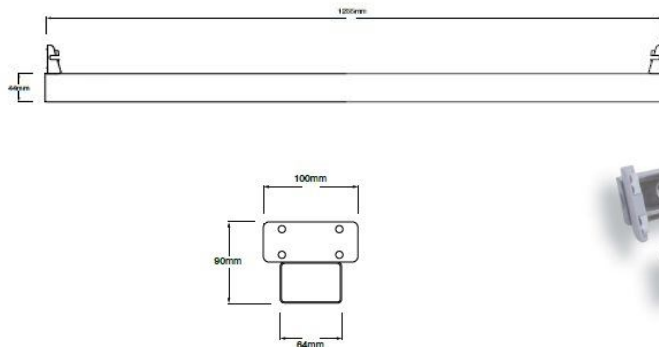

Catalogue No.	Lamp Type	Total Wattage (W)	L (mm)	W (mm)	H (mm)	Lamp Cap	Power Factor
NSC218 SS	18W	50W	625	100	90	G13	0.85
NSC236W SS	36W	84W	1240	100	90	G13	0.85
NSC236W ELB	36W	71W	1240	100	90	G13	0.98
NSC258W SS	58W	158W	1540	100	90	G13	0.85
NSC 258W ELB	58W	110W	1540	100	90	G13	0.95
NSC 18W LED-1200	18W	18W	1240	100	90	G13	-
NSC 24W LED-1500	24W	24W	1540	100	90	G13	-

BD-PFC-015-F7 Rev. 1 (Nov. 2016)

Nordland reserves the right to change any specification or design without prior notice

Tel 011 662 - 4300 | Fax 011 662 - 4319 | sales@nordland.co.za | www.nordland-lighting.com