



JBF - LS is a range of enclosed corrosion and vapour proof luminaires. The **JBF-LS** has a flame retardant body with a unique opal prismatic diffuser which optimizes the light distribution from the **LED** modules, and stainless steel clips. They are a good replacement for any standard electronic ballast luminaires. They are available in 600mm, 1200mm and 1500mm bodies. The use of **LED**'s gives a reduction in maintenance costs. The **JBF - LS** is ideally suited for applications with demanding requirements.

APPLICATIONS

- Warehouse lighting
- Industrial lighting
- Storage lighting

Permit No.
2061/9658



SANS/IEC 60598-2-1



AGENTS

Western Cape
Matelec
rushana@matelec.co.za

KZN
Afrilite
afrilite@unweb.co.za

Eastern Cape
Farad Agencies
farad@iafrica.com

Vaal Triangle
Lighting 2000
drew@lighting2000.co.za

Lighting 2020
nunnsca@gmail.com

PML (Moz.)
baptista.homo@oierlite.co.mz

Purcee Industrial Controls
patrick@purcee.net

Body: DMC, flame retardant glass fibre reinforced polyester compression moulded.

Control Gear: constant current driver. Constant current driver is provided to ensure that the operation of the **LED** modules is not affected by fluctuation of high voltages and ambient temperatures.

Dimming options available on request


Cable entry: Standard Single entry with No. 0 compression gland for cable diameter 6 – 11mm. Plugs are supplied for blanking off. Two entries or metal glands for armoured cables are optional. Glands are not provided.

Lens: Injection moulded opaque for **LED** strips with linear internal prism.

Rated life: 50000 hr. for **LED** strips


Clips: Stainless steel vandal proof clips.

Photometric Data

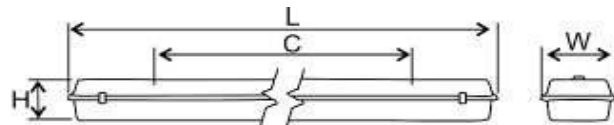

JBF- LS – 600mm



LED MODULES

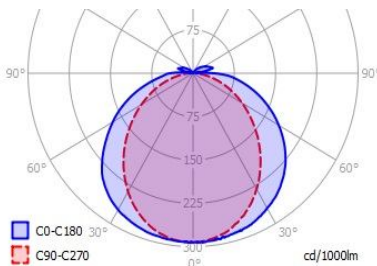

Catalogue No.	Wattage (W)	L (mm)	W (mm)	H (mm)	Lumen Output
JBF-LS 600-80-500mA	28W	700	172	115	2704
JBF-LS 600-80-700mA	39W	700	172	115	3521
JBF-LS 1200-160-500mA	53W	1310	172	115	5385
JBF-LS 1200-160-700mA	75W	1310	172	115	7024
JBF-LS 1500-200-500mA	64W	1610	172	115	5966
JBF-LS 1500-200-700mA	92W	1610	172	115	7856

JBF- LS – 1200mm

JBF- LS – 1500mm

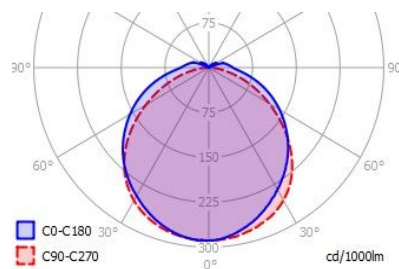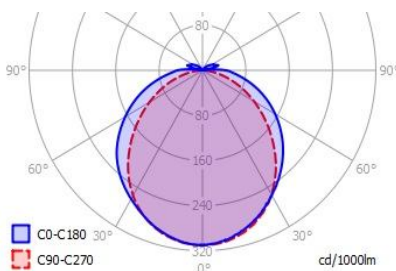

BD-PFC-007-F7 Rev. 1 (Oct. 2016)

Nordland reserves the right to change any specification or design without prior notice

Tel 011 662 - 4300 | Fax 011 662 - 4319 | sales@nordland.co.za | www.nordland-lighting.com