

JBF - LT



JBF- LT is a range of enclosed corrosion and vapour proof luminaires, has a flame retardant body polycarbonate injection moulded lens with linear prisms and stainless steel clips. Are available in 600mm; 1200mm and 1500mm T8 **LED** tubes. The luminaire is dust and moisture proof, making it ideal for applications such as indoor car parks, warehouses, dry and cold storages.

JBF- LT uses the same body and accessories as the standard **JBF** range of luminaires.

APPLICATIONS

- Warehouse lighting
- Industrial lighting
- Storage lighting

Permit No.
2061/9658



SANS/IEC 60598-2-1



BD-PFC-008-F7 Rev. 1 (Oct. 2016)

AGENTS

Western Cape
Matelec
rushana@matelec.co.za

KZN
Afrilite
afrilite@nwep.co.za

Eastern Cape
Farad Agencies
farad@iafrica.com

Vaal Triangle
Lighting 2000
drew@lighting2000.co.za

Lighting 2020
nunnsca@gmail.com

PML (Moz.)
baptista.homo@pierlite.co.mz

Purcee Industrial Controls
patnck@purcee.net

Body: DMC, flame retardant glass fibre reinforced polyester compression moulded.

Cable entry: Standard Single entry with No. 0 compression gland for cable diameter 6 – 11mm. Plugs are supplied for blanking off. Two entries or metal glands for armoured cables are optional. Glands are not provided.


Lens: Injection moulded clear polycarbonate with internal linear prisms for **LED** tubes.

LED TUBES: The milky-white frosted and clear glass tube provides high light transmittance and soft light with good impact resistance and safety. Internal constant - current driver power is provided to ensure that the operation of the **LED** tubes is not affected by fluctuation of high voltages and ambient temperatures.

Ambient Temperature: -10°C ~ +45°C

Rated life: 35000 hr. for **LED** tubes


Clips: Double action stainless steel clips.

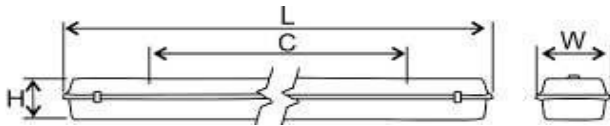

Photometric Data

JBLT 2 / 4Ft

LED TUBES

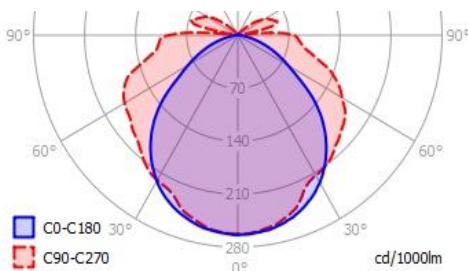

Catalogue No.	Wattage (W)	L (mm)	W (mm)	H (mm)	Lumen Output
Frosted glass tubes					
JBLT 2 / 4Ft	2x18W	1310	172	115	3610
JBLT 2 / 5Ft	2x24W	1610	172	115	4594
Clear glass tubes					
JBLT 2 / 4Ft	2x18W	1310	172	115	3926
JBLT 2 / 5Ft	2x24W	1610	172	115	4926

BD-PFC-008-F7 Rev. 1 (Oct. 2016)

Nordland reserves the right to change any specification or design without prior notice

Tel 011 662 - 4300 | Fax 011 662 - 4319 | sales@nordland.co.za | www.nordland-lighting.com