

# N50-LED600/1200



## ZONE 2, ZONE 21 & 22 HAZARDOUS AREAS



The **N50 – LED600/1200** is a high performance LED industrial luminaire, designed for dust and corrosion Zone 2 / 21,22 environments, glare free and highly efficient lighting application. The luminaire offers an excellent lumen package, long life time, and a controlled heat management.

### APPLICATIONS

- Industrial Lighting
- Hazardous Lighting
- Corrosive Atmospheres
- Mining Lighting

Permit No.  
2061/9658



SANS/IEC 60598-2-1



BD-PFC-006-F7 Rev. 1 (Oct. 2016)

## AGENTS

Western Cape  
Matelec  
[rushana@matelec.co.za](mailto:rushana@matelec.co.za)

KZN  
Afrilite  
[afrilite@ornweb.co.za](mailto:afrilite@ornweb.co.za)

Eastern Cape  
Farad Agencies  
[farad@iafrica.com](mailto:farad@iafrica.com)

Vaal Triangle  
Lighting 2000  
[drew@lighting2000.co.za](mailto:drew@lighting2000.co.za)

Lighting 2020  
[nunnasca@gmail.com](mailto:nunnasca@gmail.com)

PML (Moz.)  
[baptista.homo@pierlite.co.mz](mailto:baptista.homo@pierlite.co.mz)

Purcee Industrial Controls  
[patrick@purcee.net](mailto:patrick@purcee.net)

**Body:** Single piece deep drawn Stainless Steel 304. (The body may not be drilled on site)

**Control Gear Tray:** Aluminium gear tray carries LED driver and LED strips, is also designed to act as a reflector. Two cords allow the gear tray to be suspended from the body during installation and service.

**Clip:** Double acting. Stainless steel clips.

**Lens:** 4 mm thick clear tempered plate glass.

**Gasket:** Extruded silicone one piece gasket.

**Lens Frame:** Single piece deep drawn Stainless Steel 304.


**Frame Suspension:** The lens frame is

body to allow the glass frame to swing open.

**Cable Entry:** Threaded 20mm entry provided for a single gland via a special welded insert boss is positioned about 60mm from the mounting surface to facilitate installation. Corrosion resistant glands are recommended for use with stainless steel light fittings. Twin gland entry on request.

**Emergency Mode:** Inverter/chargers and nickel cadmium rechargeable cells can be fitted to operate in a separate **LED** module.

**Fixing:** M8 nut welded into the rear mounting brackets, allows for a bracket, suspension hooks or pole clamps.




## Product Specification

Model Name	N50-LED600	N50-LED1200
Power Consumption	33W	64W
Corrected Colour Temperature	4000K	4000K
Luminous Efficacy (system)	86 lm/W	92 lm/W
Luminous Flux	2903 lm	5949 lm
Colour Rendering Index	>80	>80
Mains Voltage	220V – 240V AC	220V – 240V AC
Mains Frequency	50 - 60 Hz	50 - 60 Hz
Driver Output (constant current)	2 x 500mA Hadler	4 x 500mA Hadler
LED Configuration	2 x Luga 560mm	4 x Luga 560mm
Power Factor	>0.93	>0.96
Ambient Temperature	-20 to 40° C	-20 to 30° C
Rated Lifetime	50 000 Hours (L90/B10)	50 000 Hours (L90/B10)
Luminaire Weight	6.5Kg	10.3Kg


## Photometric Data

### N50-LED600

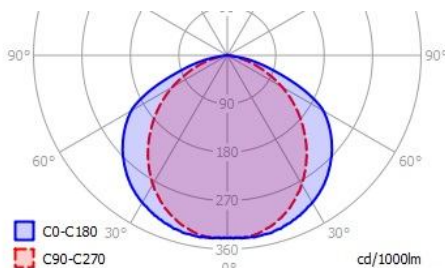

L = 790mm  
W = 230mm  
H = 135mm  
FC = 490mm

### N50-LED1200

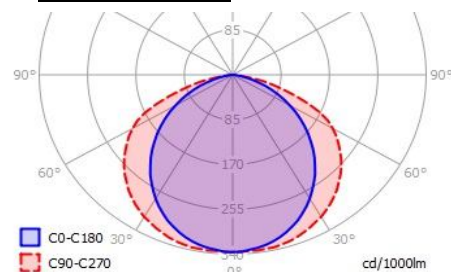

L = 1372mm  
W = 230mm  
H = 135mm  
FC = 1100mm

BD-PFC-006-F7 Rev. 1 (Oct. 2016)

*Nordland reserves the right to change any specification or design without prior notice*