

NF228-LED



AGENTS

Western Cape
Matelec

rushana@matelec.co.za

KZN

Afrilite

afrilite@nwweb.co.za

Eastern Cape
Farad Agencies

farad@iafrica.com

Vaal Triangle
Lighting 2000

drew@lighting2000.co.za

Lighting 2020

nunnasca@gmail.com

PML (Moz.)

baptista.homo@pierlite.co.mz

Purcee Industrial Controls

patrick@purcee.net


The **NF228-LED** floodlight with a new heat dissipation technology, thermal conductivity 2.5 times higher than the conventional die-cast aluminium body. Integrated design with a perfect combination of driver and LED module. Advance ergonomic light distribution, high transmittance mosaic diamond shape lens for even light distribution and glare free. The LED floodlight is available in three different wattages. Operates at -30°C to +45°C

Applications: security areas, outdoor car parking, landscape lighting and area lighting


Technical Specification

Wattage	60W	90W	150W
CCT (K)	5700	5700	5700
Rated luminous flux (Lm)	4800	7200	12000
CRI (Ra)	70	70	70
Efficiency (Lm/W)	80	80	80
Dimensions (mm)	217 / 153	248 / 179	310 / 231
Beam angle	60°	60°	60°
IP rating	IP65		
Rated life (Hrs)	35000		

Intensity Distribution Diagram



Product size

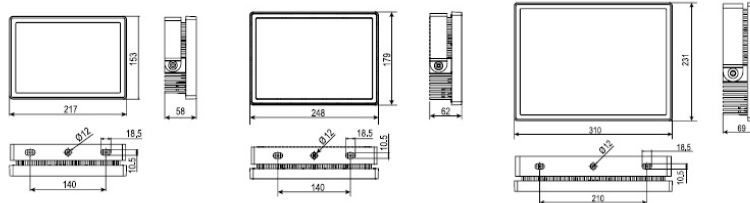

BD-PFC-011-F7 Rev. 1 (Oct. 2016)

Nordland reserves the right to change any specification or design without prior notice.