

# NF228-LED



## AGENTS

Western Cape  
Matelec

[rushana@matelec.co.za](mailto:rushana@matelec.co.za)

KZN

Afrilite

[afrilite@nwweb.co.za](mailto:afrilite@nwweb.co.za)

Eastern Cape  
Farad Agencies

[farad@iafrica.com](mailto:farad@iafrica.com)

Vaal Triangle  
Lighting 2000

[drew@lighting2000.co.za](mailto:drew@lighting2000.co.za)

Lighting 2020

[nunnasca@gmail.com](mailto:nunnasca@gmail.com)

PML (Moz.)

[baptista.homo@pierlite.co.mz](mailto:baptista.homo@pierlite.co.mz)

Purcee Industrial Controls

[patrick@purcee.net](mailto:patrick@purcee.net)


The **NF228-LED** floodlight with a new heat dissipation technology, thermal conductivity 2.5 times higher than the conventional die-cast aluminium body. Integrated design with a perfect combination of driver and LED module. Advance ergonomic light distribution, high transmittance mosaic diamond shape lens for even light distribution and glare free. The LED floodlight is available in three different wattages. Operates at -30°C to +45°C

**Applications:** security areas, outdoor car parking, landscape lighting and area lighting


## Technical Specification

<b>Wattage</b>	60W	90W	150W
<b>CCT (K)</b>	5700	5700	5700
<b>Rated luminous flux (Lm)</b>	4800	7200	12000
<b>CRI (Ra)</b>	70	70	70
<b>Efficiency (Lm/W)</b>	80	80	80
<b>Dimensions (mm)</b>	217 / 153	248 / 179	310 / 231
<b>Beam angle</b>	60°	60°	60°
<b>IP rating</b>	IP65		
<b>Rated life (Hrs)</b>	35000		

## Intensity Distribution Diagram



## Product size

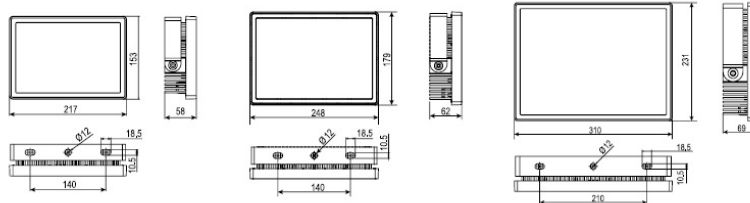

BD-PFC-011-F7 Rev. 1 (Oct. 2016)

Nordland reserves the right to change any specification or design without prior notice.