

NHL700-LED



AGENTS

Western Cape
Matelec

rushana@matelec.co.za

KZN

Afrilite

afrilite@mweb.co.za

Eastern Cape
Farad Agencies

farad@iafrica.com

Vaal Triangle
Lighting 2000

drew@lighting2000.co.za

Lighting 2020

nunnsca@gmail.com

PML (Moz.)

baptista.homo@pierlite.co.mz

Purcee Industrial Controls

patrick@purcee.net


The **NHL700 LED** high bay with a unique heatsink technology and super-light design. Advance ergonomic light distribution, high transmittance lens for even light distribution. The LED high bay is available in three reflector sizes for different type of wattages. High efficient and 30000 hours service life. Operates at -20°C to +40°C

Applications: Storage areas, workshop, warehouse and supermarkets.


Technical Specification

Wattage	100W	150W	200W
CCT (K)	5700	5700	5700
Rated luminous flux (Lm)	9000	13500	18000
CRI (Ra)	70	70	70
Efficiency (Lm/W)	90	90	90
Dimensions (mm)	402 Ø / 349 H	410 Ø / 353 H	460 Ø / 400 H
Beam angle	90°	90°	90°
IP rating	IP54		
Rated life (Hrs)	30000		

Intensity Distribution Diagram

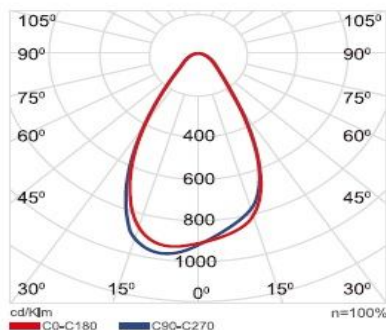

Product size

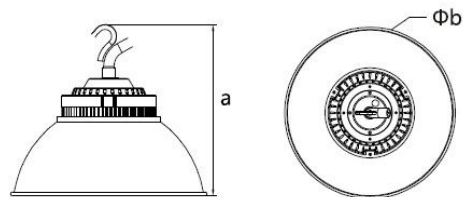

BD-PFC-014-F7 Rev. 1 (Oct. 2016)

Nordland reserves the right to change any specification or design without prior notice.

Tel 011 662 - 4300 | Fax 011 662 - 4319 | sales@nordland.co.za | www.nordland-lighting.com