



**Permit No.
2061/9658**



SANS/IEC 60598-2-1

JBF/IP65 luminaire range has a flame retardant body, polycarbonate injection moulded lens with linear prisms, with stainless steel clips.

Available in 18 W, 36 W and 58 W versions.

Ingress Protection: IP65

Nordland (Pty) Ltd PO Box 522 Muldersdrift 1747 Tel (011) 662 4300 Fax (011) 662 4319 Email cyril@nordland.co.za	Matelec (Pty) Ltd Unit 13, Magnum Park 108 Bofors Circle Epping 2, Cape Town 7460 Tel (021) 534 9544 Fax (021) 534 7132 Email rushana@matelec.co.za	Afrilite cc Unit 10, Rossmead 14 Malone Road Westmead Industrial Park Pinetown 3610 Tel/Fax (031) 701 1119 Email afrilite@mweb.co.za	Australia Hella Australia (Pty) Ltd Southern Road Mentone Victoria 3194 Tel (3) 9581 9333 Fax (3) 9585 2654	Indonesia PT. Raphita Jaya Mandiri Jl Baturaden Raya No 135 Block IV/Utara, Perumahan Bumi Bekasi Baru, Pengasinan, Bekasi 17115 Tel (62) 021-8 24 26143
---	--	---	--	---

Body: DMC, flame retardant glass fibre reinforced polyester compression moulded.

Control Gear Tray: The white epoxy powder coated steel control gear tray carries the control gear and lampholders, and also acts as a reflector. Two nylon cords allow the gear tray to be suspended from the body during installation and service.

Lamps: Only G13 Bi-pin type Lamps are suitable.

Clip: Double acting, Stainless steel clips.

Control Gear: Switch Start, Electronic 230 V, 50 Hz.

Emergency Mode: Rechargeable nickel cadmium cells and an inverter charger can be fitted within the body of the luminaire: The circuit would be maintained.


Cable Entry: Standard Single entry with No. 0 Compression gland for cable diameter 6 – 11 mm. Two entry or metal glands for armoured cable are extra.

Lens: Injection moulded polycarbonate with internal linear prism.

Mounting: M6 body insert kits supplied. Suitable for hook or bracket suspension.



Accessory abbreviations:	
SS	Switch Start Control Gear suitable for 26 mm and 38 mm lamps
ELB	Electronic control gear, operates down to - 20C.
CG	Inverter Powered 110 V, 230 V

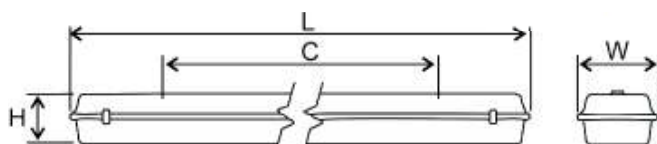

Sizes of JBF luminaires

Catalogue Number				Dimensions (mm)			Fixing Centres	No. Clips	Mass (kg)
	SS	ELB	110 V	L	W	H	C		
JBF 218 W T8	✓	✓	✓	700	172	115	500	6	3.5
JBF 236 W T8	✓	✓	✓	1310	172	115	800	8	5.0
JBF 258 W T8	✓	✓	✓	1610	172	115	1100	10	7.0