

NGB – 90 LED



NGB 90 LED & NGB 90 LED ASYM (code B60105)

The **NGB 90 LED** bulkhead luminaire range has been designed for indoor and outdoor lighting installations and industrial applications and security lighting applications. This weather-proof bulkhead luminaire range is suitable for ceiling, wall or pole mounting.

APPLICATIONS:

- Industrial Lighting
- Conveyor Lighting
- Security Lighting

Permit No.
2061/9658



SANS/IEC 60598-2-1

Ingress Protection : IP65



AGENTS

Western Cape
Matelec
rushana@matelec.co.za

KZN
Afrilite
afrite@turnweb.co.za

Eastern Cape
Farad Agencies
farad@iafrica.com

Vaal Triangle
Lighting 2000
drew@lighting2000.co.za

Lighting 2020
nunnsca@gmail.com

PML (Moz.)
baptista.homo@piorlite.co.mz

Purcee Industrial Controls
patrick@purcee.net

Housing: Manufactured from LM6 high pressure die cast aluminium, with a heavy duty toughened smooth clear glass refractor, fitted into a die cast aluminium frame.

Frame: The frame is fitted with 6 spring stainless steel fingertip latches which hold the frame in position. The hinged frame is reversible for easy installation.

Gasket: Round silicone sponge gasket retained within a recess in the cast aluminium base provides a seal for outdoor use.

Control Gear: Constant Current LED driver 220V/240V, 50/60Hz

Screws: All external screws are made of stainless steel.


Cable entry: Single compression gland for cable diameter 8-11mm.

Emergency Version: The bulkhead is suited for use as a self-contained **LED** emergency lighting luminaire.

Mountings: the body incorporates many choices of options including: wall and ceiling brackets, angled wall brackets, anti-vibration brackets, pole mounting bracket and angled post top brackets.


LED: The bulkhead is designed to take, 3 x **LED** with lens for asymmetrical (wall mounted) and wider distributions.

Rated life time: 50000 Hr. (L70/B10)


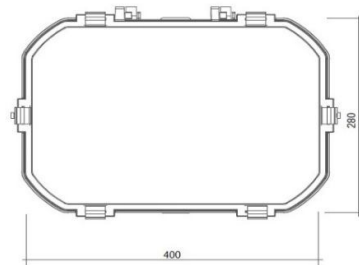


Photometric data

NGB 90LED

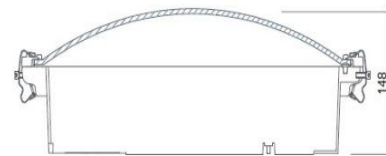

NGB 90LED ASYM

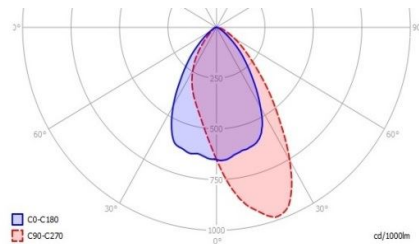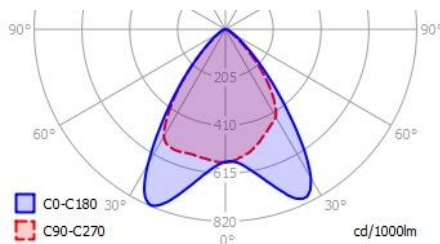

Catalogue Number	Wattage (W)	Lumen	Length (mm)	Width (mm)	Height (mm)
NGB 90LED	35W	3333	400	280	148
NGB 90LED / ASYM	35W	3699	400	280	148

BD-PFC-010-F7 Rev. 2 (Jan. 2017)

Nordland reserves the right to change any specification or design without prior notice

Tel 011 662 - 4300 | Fax 011 662 - 4319 | sales@nordland.co.za | www.nordland-lighting.com