



**JBF - LS** is a range of enclosed corrosion and vapour proof luminaires. The **JBF-LS** has a flame retardant body with a unique opal prismatic diffuser which optimizes the light distribution from the **LED** modules, and stainless steel clips. They are a good replacement for any standard electronic ballast luminaires. They are available in 600mm, 1200mm and 1500mm bodies. The use of **LED**'s gives a reduction in maintenance costs. The **JBF - LS** is ideally suited for applications with demanding requirements.

## APPLICATIONS

- Warehouse lighting
- Industrial lighting
- Storage lighting



## AGENTS

Western Cape  
Matelec  
[rushana@matelec.co.za](mailto:rushana@matelec.co.za)

KZN  
Afrilite  
[afrilite@nwep.co.za](mailto:afrilite@nwep.co.za)

Eastern Cape  
Farad Agencies  
[farad@iafrica.com](mailto:farad@iafrica.com)

Vaal Triangle  
Lighting 2000  
[drew@lighting2000.co.za](mailto:drew@lighting2000.co.za)

Lighting 2020  
[nunnsca@gmail.com](mailto:nunnsca@gmail.com)

PML (Moz.)  
[baptista.homo@pierlite.co.mz](mailto:baptista.homo@pierlite.co.mz)

Purcee Industrial Controls  
[patrick@purcee.net](mailto:patrick@purcee.net)

**Body:** DMC, flame retardant glass fibre reinforced polyester compression moulded.

**Control Gear:** constant current driver. Constant current driver is provided to ensure that the operation of the **LED** modules is not affected by fluctuation of high voltages and ambient temperatures.

**Dimming options available on request**


**Cable entry:** Standard Single entry with No. 0 compression gland for cable diameter 6 – 11mm. Plugs are supplied for blanking off. Two entries or metal glands for armoured cables are optional. Glands are not provided.

**Lens:** Injection moulded opaque for **LED** strips with linear internal prism.

**Rated life:** 50000 hr. for **LED** strips


**Clips:** Stainless steel vandal proof clips

## Photometric Data

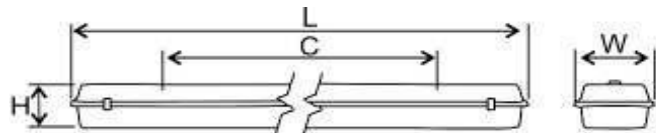


## LED MODULES


### JBF- LS – 600mm

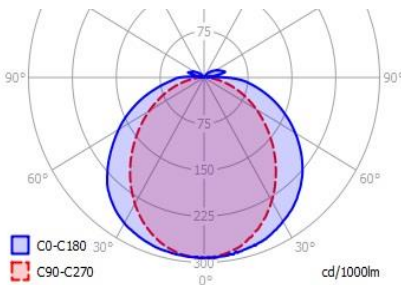

### JBF- LS – 1500mm

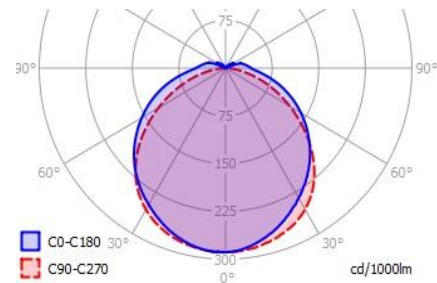

### JBF- LS – 1200mm

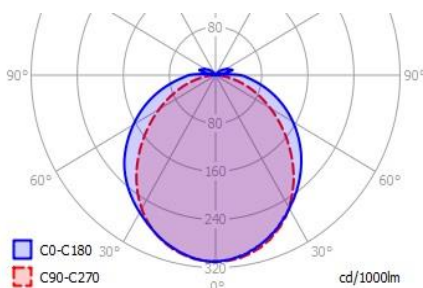

BD-PFC-007-F7 Rev. 1 (Oct. 2016)

*Nordland reserves the right to change any specification or design without prior notice*

Tel 011 662 - 4300 | Fax 011 662 - 4319 | [sales@nordland.co.za](mailto:sales@nordland.co.za) | [www.nordland-lighting.com](http://www.nordland-lighting.com)

## **LED MODULES**

<b>Catalogue No.</b>	<b>Wattage (W)</b>	<b>L (mm)</b>	<b>W (mm)</b>	<b>H (mm)</b>	<b>Lumen Output</b>
JBF-LS 600-80-500mA	26W	700	172	115	3172
JBF-LS 600-80-350mA	36W	700	172	115	4356
JBF-LS 1200-160-500mA	52W	1310	172	115	6344
JBF-LS 1200-160-350mA	72W	1310	172	115	8784
JBF-LS 1500-200-500mA	64W	1610	172	115	7808
JBF-LS 1500-200-350mA	90W	1610	172	115	10980

**Tel 011 662 - 4300 | Fax 011 662 - 4319 | [sales@nordland.co.za](mailto:sales@nordland.co.za) | [www.nordland-lighting.com](http://www.nordland-lighting.com)**