Zone 1 Exd Ballast

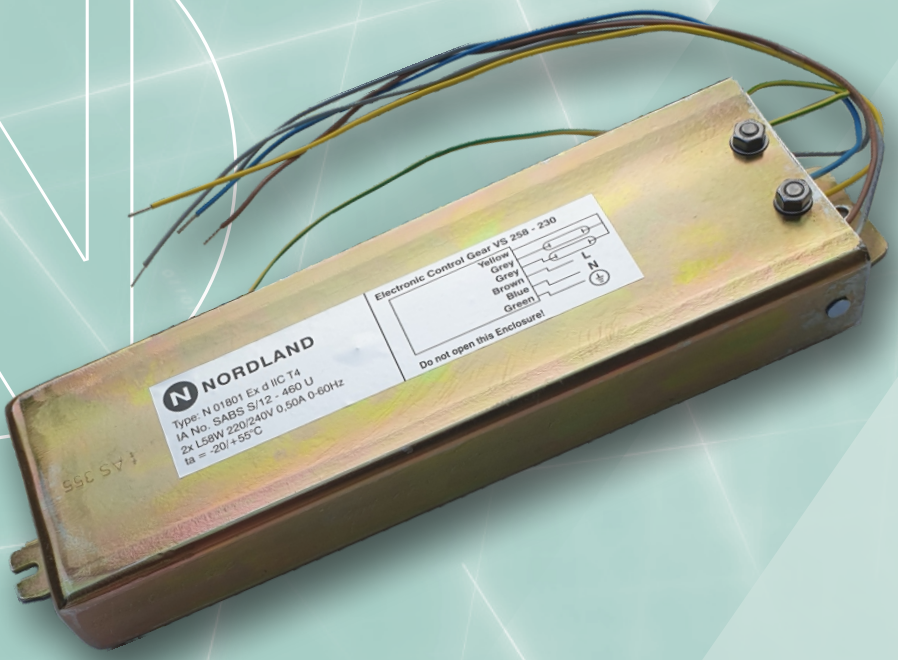

Model Name	V20018SUB	V20021SUB	V20031SUB
Luminaire Length	2ft	4ft	5ft
Lamp Output	2 x 18	2 x 36	2 x 58
Lamps	18W Fluorescent	36W Fluorescent	58W Fluorescent
Input Voltage	230+-10%		
Current @ 230V	0.17A	0.31A	0.47A
Power Factor (Full load)	0.92	0.96	0.98
Lamp startup time	Instant		
Ambient Temperature	-20°C to +50°C		
Dimensions	L x W x H		
	288 x 91 x 41mm		
IA Certification Detail	SABS S/12-460U		
Ex rating	Ex d IIC		

Note: Lightning Protection: All electronic products such as light fittings and computers are subject to violent destruction when struck by lightning. An independent lightning protection device, well earthed, needs to be inserted in the supply line before the lighting circuit, where any electronic control gear is used in light fittings. Control gear damaged by lightning is not covered under guarantee.

NORDLAND LIGHTING®

Nordland reserves the right to change any specification or design without prior notice.

Tel: 010 442 2809 | Fax 011 662 4319 | sales@nordland.co.za | www.nordland-lighting.com