



The **NBV** rectangular series bulkhead, stylish, economical and all South African energy efficient compact fluorescent robust suitable for industrial and/or public buildings, weather-proof ceiling or wall mounting luminaires if required, particularly where low running costs and long trouble-free operation are important. Suitable for indoor and outdoor applications.

Permit No.
2061/9658



Applications:

- Subway Lighting
- Stairways Lighting
- Corridor Lighting
- Landings
- Ramps
- Public Buildings

Ingress Protection: 55

Body Housing: Thin wall, manufactured from LM6 die cast aluminium. Finished in white epoxy powder coated.

Diffuser: One-piece injection-moulded from clear impact and thermal resistance UV stabilized polycarbonate with internal prisms and smooth exterior visor.

Gasket: Captive silicone gasket provides seal for outdoor use. Ideal for wet or dust locations.

Lamp holder: Only 2G11 type linear compact fluorescent lamps are suitable.

Control Gear: 230 V electronic control gear is used with terminal block suitable for 4 mm².

Screws: Two captive stainless steel screws operate through the diffuser flange for easy location.

Lamps: The bulkhead can be supplied with two 11 W or one 18 W linear compact fluorescent lamps as well as with 5W and 8W **LED** for emergency signs.

Cable Entry: Single compression gland size 00.

Emergency Version: The bulkhead is suited for use as a self-contained LED emergency lighting luminaire. Internal inverter charger and battery pack, are mounted on the control gear tray.

Maintained and non-maintained modes.



Emergency Duration: 3 Hours or 6 Hours.

Reflector: The reflector system is manufactured from mild steel sheet, formed for extra strength and finished in hard baked white epoxy paint.

NBV is suitable for use as an exit sign. For this option the appropriate decal is applied to the diffuser. Decals to be ordered separately.

Options:

-/MR/AL - Man running, arrow left decal
-/MR/AR - Man running, arrow right decal
-/MR/AD - Man Running, arrow down decal
-/EXIT - Exit decal

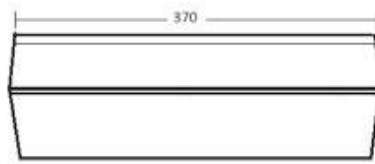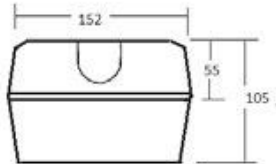

Catalogue Number	Wattage (W)	Length (mm)	Width (mm)	Height (mm)	Electronic	Mass (kg)
NBV 2x11 W CFL	2x11 W	370	152	55	26 W	2.17
NBV 1x18 W CFL	18 W	370	152	55	19 W	2.08
NBV 1 Luga 8W LED	8W	370	152	55	8W	2.06
NBV LED Strip / EM	5 W	370	152	55	5 W	2.04