

NSC SERIES



The **NSC** is a high quality stainless steel 304 open channel range of luminaires suitable for use with T8 (26mm) fluorescent as well as suitable for **LED TUBES**. Slender and versatile, the stainless steel channel offers resistance to more corrosive elements as well offers a Hi-Tech look to the retailing industry. Available in 600mm, 1200mm, 1500mm double lamp version only, and also available with a stainless steel wing.

APPLICATIONS

Ideal for

- Distribution Centres
- Warehouse lighting
- Factory lighting
- Storage lighting
- Parking Garrages and walkways
- Retail / shopping lighting
- Coastal areas, subject to higher than normal humidity.

Ingress Protection: IP20



AGENTS

Western Cape
Matelec
rushana@matelec.co.za

KZN
Afrilite
afrilite@irnweb.co.za

Eastern Cape
Farad Agencies
farad@iafrica.com

Vaal Triangle
Lighting 2000
drew@lighting2000.co.za

Lighting 2020
nunnsc@gmail.com

PML (Moz.)
baptista.homo@pierlite.co.mz

Purcee Industrial Controls
patrick@purcee.net

Body: Formed from Stainless Steel, and the control gear cover acts as a reflector. The reflector is secured by means of two stainless steel butterfly nuts.

Control Gear: Switch start and electronic ballasts available for the 18W, 36W and 58W double lamps.

Lamp holders: Twist lock, one end spring-loaded the other fixed.

Lamp holder End cap: The lamp holders are clipped into an injection moulded end cap to hold the lamps securely in position. The lamp cap is notched to allow for easy access.


Emergency: these fluorescent luminaires can be fitted with inverter charger and battery backup, to operate in the maintained mode.

Mounting: two bosses are stamped into the back of the luminaire with a 5mm central hole.

Entries: provision is made for a knockout at either end.

The body is punched with a centre rose to match a standard outlet box.

Dimming options available on request

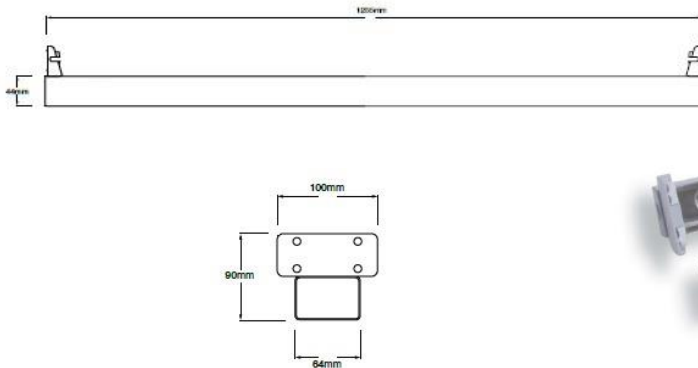

Catalogue No.	Lamp Type	Total Wattage (W)	L (mm)	W (mm)	H (mm)	Lamp Cap	Power Factor
NSC218 SS	18W	50W	625	100	90	G13	0.85
NSC236W SS	36W	84W	1240	100	90	G13	0.85
NSC236W ELB	36W	71W	1240	100	90	G13	0.98
NSC258W SS	58W	158W	1540	100	90	G13	0.85
NSC 258W ELB	58W	110W	1540	100	90	G13	0.95
NSC 18W LED-1200	18W	18W	1240	100	90	G13	-
NSC 24W LED-1500	24W	24W	1540	100	90	G13	-

BD-PFC-015-F7 Rev. 1 (Nov. 2016)

Nordland reserves the right to change any specification or design without prior notice

Tel 011 662 - 4300 | Fax 011 662 - 4319 | sales@nordland.co.za | www.nordland-lighting.com