


Ex ia Zone 0 Area Light

Zone 0

The **Ex ia Zone 0 Area Light** is a specialised Intrinsically safe Hazardous area luminaire for use in Zone 0 applications underground at the rock face. It consists of three 3W LED lamps with special optics for area distribution. It is designed to be hung on roof bolts spaced according to the installation manual. The **Ex ia Zone 0 Area Light** continues the proud heritage of NORDLAND LIGHTING's quality standards.

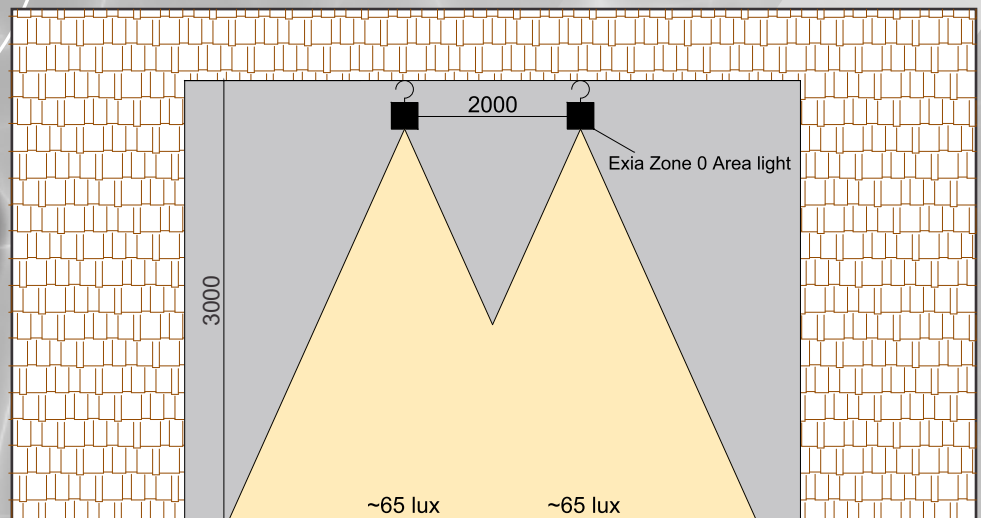

Application: Zone 0 Ex ia Areas

Ex-mark: Ex ia I/IIC T4

Body: Manufactured from injection moulded Polycarbonate and housed in a powder coated Mild steel cage.

Optic: LED's are diffused and spread with special optics for area lighting.

Lamps: Consists of three 3W LED lamps.

Control Gear: Electronic control gear running from Battery power to supply the LED's with power constantly for 30 hours on a full charge.

Charging: Charges from a standard Cap Lamp charger.

Mounting: The cage houses a permanent hook for hanging the luminaire on roof bolts. The installation is done by elevating the light with a charge stick to the mounting point.

Ingress Protection Rating: IP68

Nordland reserves the right to change any specification or design without prior notice.



NORDLAND LIGHTING

Tel: 011 662-4300 | Fax 011 662-4319 | sales@nordland.co.za | www.nordland-lighting.com